


60W Single Output Switching Power Supply

- *Universal AC input/ full range*
- *Protections:*
short circuit/ over load/ over voltage
- *Approvals: UL/ CUL/ TUV/ CB/ CE*
- *Free air cooling convection*
- *Fix switching frequency at 50KHz*
- *100% full load burn-in test*
- *2 years warranty*

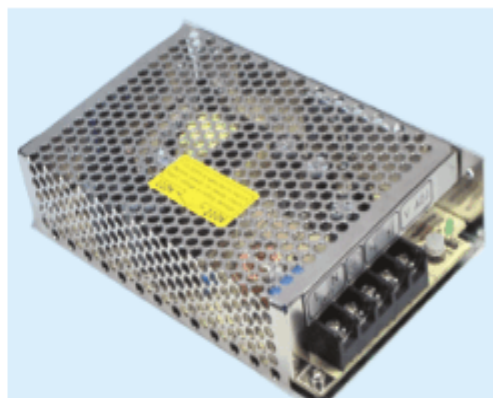

CASE: 901

159x97x38 mm

AC input voltage range.....	85~264VAC; 120~370VDC
AC Inrush current.....	cold start, 30A/ 115V, 60A/ 230V
DC adjust range.....	±10% of rated output voltage
Over load protection.....	105%~150% hiccup mode, auto-recovery
Over voltage protection.....	115%~135% of rated output voltage
Set, rise, hold up time.....	300ms, 50ms, 60ms at full load and 230VAC
Withstand voltage.....	I/P-O/P:3KVAC, I/P-FG:1.5KVAC for 1minute
Working temperature.....	0-50°C@100%, -10°C@80%, 60°C@60% load
Safety standards.....	UL 1012, UL 1950, TUV EN60950 approved
EMC standards.....	EN55022 class B, EN61000-3-2, 3 EN61000-4-2, 3, 4, 5, 6, 8, 11, ENV50204
Connection.....	5P/ 9.5mm pitch terminal block
Weight/ packing.....	0.55kgs/pcs; 30pcs/ 17kgs/ 1.2CUFT

Stock No	Type No	Output	Tol.	R&N	Effi.	P.P.
10051	S-60-5	5V, 0~12 A	±2%	120mV	73%	49
10052	S-60-12	12V, 0~5.0A	±1%	120mV	76%	49
10053	S-60-15	15V, 0~4.0A	±1%	150mV	77%	49
10054	S-60-24	24V, 0~2.5A	±1%	150mV	79%	49