


Smaller  
Lighter  
Shortcircuit protection  
Overload protection  
Protection index IP44  
Wide range

# LIGHTINGTRANSFORMER

24/40/60VA

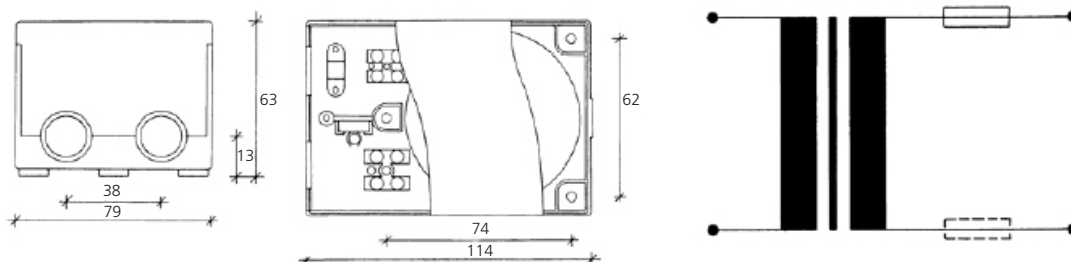

Vadsbo Transformatorer ab  
Aröds Industriväg 34  
SE-422 43 Hisings Backa  
Sweden

Phone +46-31-235600  
Fax +46-31-226010  
E-mail info@vadsbo.net  
Web www.vadsbo.net

**VADSBO** 

## LIGHTING TRANSFORMERS, 24-60VA

<b>Power VA</b>	24 VA	40 VA	60 VA
<b>Art. Nr.</b>	V-1002410	V-1004010	V-1006010
<b>Designation</b>	VA-BT 24-S	VA-BT 40-S	VA-BT 60-S
<b>Voltage primary</b>	230V	230V	230V
<b>Voltage secondary</b>	11,8V	11,8V	11,8V
<b>Load</b>	24W	40W	60W
<b>Test voltage</b>	4kV	4kV	4kV
<b>Temperature class</b>	B	B	B
<b>Ambient temperature max.</b>	+ 45°C	+ 45°C	+ 45°C
<b>Dimensions (LxWxH mm)</b>	114 x 79 x 63	114 x 79 x 63	114 x 79 x 63
<b>Weight</b>	0,65kg	0,71kg	0,8kg
<b>Colour</b>	White	White	White
<b>Isolation class</b>	II	II	II
<b>Protection index</b>	IP44	IP44	IP44
<b>Cover</b>	Yes	Yes	Yes
- non-combustible thermoplastic			
<b>Protection against</b>			
- short-circuiting	Yes	Yes	Yes
- overload	Yes	Yes	Yes
<b>Manufacturing standard</b>	EN 61558	EN 61558	EN 61558
<b>Approvals</b>	S/CE/EMC	S/CE/EMC	S/CE/EMC
<b>EMC-requirements</b>	Approved	Approved	Approved
<b>Connections</b>			
- primary screwterm	Yes	Yes	Yes
- secondary screwterm	Yes	Yes	Yes
<b>Number of screwter, sec.</b>	1	1	1
<b>Applications</b>			
- for stationary use	Yes	Yes	Yes